

On the rheology of till

A. C. Fowler

Mathematical Institute, University of Oxford,
24-29 St Giles', Oxford OX1 3LB, England.

February 5, 2003

Abstract

The deformation of subglacial till is instrumental in causing certain glacier surges, the motion of rapid ice streams in ice sheets, and ice sheet surges which are associated with Heinrich events, and consequent rapid climatic shifts, during the last ice age. It may also be the means whereby drumlins are formed, and these in turn may act as a brake on large scale ice flow. It is therefore important in building models to understand the rate at which till deforms, and how this controls the basal ice velocity. In recent years, two paradigms have emerged. On the one hand, theoreticians have tended to use a viscous rheology, though this lacks quantitative support. On the other hand, field and laboratory studies suggest that till behaves plastically. In this paper I will examine some of the dynamic consequences of this latter assumption, and show how the dichotomy between viscous and plastic may be less clearcut than previously thought.

1 Introduction

The mechanism of basal motion and subglacial drainage is fundamental to the understanding of many of the dramatic phenomena exhibited by glaciers and ice sheets. Within the context of fast glacier flow, surging glaciers (Clarke and others, 1984), surging ice sheets (MacAyeal, 1993), ice streams (Bentley, 1987) and receding tide-water glaciers (Meier and Post, 1987) are all able to attain their rapid ice velocities by means of water-assisted basal motion.

There are two main conceptual paradigms available to understand how such rapid motion occurs. These are the sliding of ice over a rough surface (which might be bedrock, or stiff till) (Lliboutry, 1979, Weertman, 1979), and the deformation of water-saturated till at high pore water pressures (Boulton and Jones, 1979, Clarke,

1987). Because of the occurrence of layers of apparently deforming subglacial till in certain glaciers (e. g., Blankenship and others, 1987, Clarke and others, 1984, Truffer and others, 2000), much of the attention of modellers has shifted from earlier ‘hard bed’ studies to the study of subglacial till deformation, and its consequence for glacier motion.

The subject of this paper is the rheology of till: what is the best flow law to describe sediment motion and transport? Various theoretical studies have used a power law advocated by Boulton and Hindmarsh (1987) of the form

$$\dot{\varepsilon}_{ij} = \frac{f(\tau, N)}{\tau} \tau_{ij}, \quad (1.1)$$

in which $\dot{\varepsilon}_{ij}$ is the strain rate tensor, τ_{ij} is the deviatoric stress tensor, and N is the effective (overburden minus pore water) pressure. (1.1) is not the most general viscous law one could suggest. For an isotropic material, f is in general a function of the first (N), second (τ) and also third invariant of the effective stress tensor. For an anisotropic material, this may not be the case. Boulton and Hindmarsh proposed a power law of the form

$$f(\tau, N) = \frac{A\tau^r}{N^s}, \quad (1.2)$$

but the reliability of this law has never been demonstrated. Nevertheless, it has been used frequently in theoretical models of subglacial processes (e. g., Alley and others, 1987, Hindmarsh, 1998, Fowler, 2000, Ng, 2000), at least partly because of its conceptual simplicity. It also enshrines the apparently reasonable expectation that till deformation should increase with increasing shear stress, and decrease with increasing effective pressure.

However, till is a granular material, and as such can be expected to have the characteristics of an elastic-plastic material, with a yield stress determined by a Mohr-Coulomb failure criterion due to internal frictional slip (e. g., Harris, 1992). Indeed, much recent work has demonstrated that a plastic flow law is better suited to the description of subglacial till (Kamb, 1991, Hooke and others, 1997, Iverson and others, 1997, Tulaczyk and others, 2000, Kamb, 2001).

In this paper, I examine the implications of this for the flow of till, in particular because deformation of till with depth is commonly inferred, or observed, to occur (Alley, 2000, Boulton and Dobbie, 1998, Truffer and others, 2000, Porter and Murray, 2001), and it is not intrinsically obvious how such observations can be used to distinguish plastic rheology from an effectively viscous behaviour. Indeed, Hindmarsh (1997) suggested (without any justification) that local plastic behaviour might become apparently viscous at larger scales of observation. Iverson and Iverson (2001) showed that a model based on discrete slip events of a Coulomb plastic material could lead to distributed deformation. A different attempt in this direction is that of Tulaczyk and others (2000); see also Tulaczyk (1999).

2 Plasticity theory

In this section we discuss some classical continuum models of plasticity. An alternative approach is that of distinct-element modelling (Cundall and Strack, 1979, Morgan and Boettcher, 1999), in which direct simulation of ‘particle’ motion using Newton’s law together with suitable friction rules is done. This approach is similar in some ways to that used by Iverson and Iverson (2001). The basic theory of plasticity is enunciated by Hill (1950). A more recent text which discusses plasticity for soils is that of Chen and Mizuno (1990). An elastic-plastic material is one for which the rheology is elastic for stresses ‘below’ a yield surface in (six-dimensional) stress space. If σ_{ij} is the stress tensor and τ_{ij} is the deviatoric stress tensor, then frame indifference must allow us to write the yield surface in the form

$$f(\sigma_{ij}) = f(I_1, J_2, J_3) = f_c, \quad (2.1)$$

where I_1 , J_2 and J_3 are first, second and third stress invariants defined by

$$I_1 = \sigma_{ii}, \quad J_2 = \frac{1}{2}\tau_{ij}\tau_{ij}, \quad J_3 = \frac{1}{3}\tau_{ij}\tau_{jk}\tau_{ki}, \quad (2.2)$$

and we employ the summation convention over repeated indices. A plastic material is one whose stresses cannot go beyond the yield surface. Thus deformation is purely elastic until the yield surface is reached, and then plastic deformation occurs along

the yield surface. In general, an increment of stress $d\sigma_{ij}$ causes an increment in strain $d\varepsilon_{ij} = d\varepsilon_{ij}^e + d\varepsilon_{ij}^p$, where $d\varepsilon_{ij}^e$ is the increment of elastic strain, and $d\varepsilon_{ij}^p$ is the increment of plastic strain (which must be determined). An ideal plastic material is one for which the yield surface $f(\sigma_{ij})$ is fixed (i.e., is not state-dependent), and in which there is an *associated* flow rule, said to satisfy the normality condition:

$$d\varepsilon_{ij}^p = d\lambda \frac{\partial f}{\partial \sigma_{ij}}. \quad (2.3)$$

As we discuss further below, soils (and tills) do not satisfy either of these conditions. Because of the extra condition on the stress, the quantity λ in (2.3) is unknown, and acts as a Lagrange multiplier. It follows from the usual constitutive equations of elasticity that

$$d\varepsilon_{ij} = \frac{dI_1}{9K} \delta_{ij} + \frac{d\tau_{ij}}{2G} + d\lambda \frac{\partial f}{\partial \sigma_{ij}}, \quad (2.4)$$

and consistency (f is constant) requires

$$d\lambda = \frac{2G \frac{\partial f}{\partial \sigma_{ij}} d\varepsilon_{ij} + (K - \frac{2}{3}G) d\varepsilon_{kk} \frac{\partial f}{\partial \sigma_{kk}}}{2G \frac{\partial f}{\partial \sigma_{ij}} \frac{\partial f}{\partial \sigma_{ij}} + (K - \frac{2}{3}G) \left(\frac{\partial f}{\partial \sigma_{kk}} \right)^2}. \quad (2.5)$$

Note that for $f = f(I_1, J_2, J_3)$, we have

$$\frac{\partial f}{\partial \sigma_{ij}} = \delta_{ij} \frac{\partial f}{\partial I_1} + \tau_{ij} \frac{\partial f}{\partial J_2} + \left(\tau_{ik} \tau_{kj} - \frac{2}{3} J_2 \delta_{ij} \right) \frac{\partial f}{\partial J_3}. \quad (2.6)$$

Various yield criteria are commonly used in plasticity theory, and these must be written in terms of the invariants of the stress. The Von Mises criterion is $J_2 = k^2$, the Tresca criterion is $\sigma_1 - \sigma_3 = 2k$, and the Coulomb model can be written in the form $\frac{1}{2}(\sigma_1 - \sigma_3) = -\frac{1}{2}(\sigma_1 + \sigma_3) \sin \phi + \cos \phi$, where $\sigma_1 > \sigma_2 > \sigma_3$ are the principal stress components, ϕ is the internal angle of friction, and c is the cohesion. In terms of invariants, these are messy, and take the form

$$\begin{aligned} \text{Coulomb :} \quad & \frac{1}{3} I_1 \sin \phi + \sqrt{\frac{1}{3} J_2} \left[(1 + \sin \phi) \cos \theta - (1 - \sin \phi) \cos(\theta + \frac{2}{3}\pi) \right] - c \cos \phi = 0, \\ \text{Tresca :} \quad & 4J_2^3 - 27J_3^2 - 36k^2 J_2^2 + 96k^4 J_2 - 64k^3 = 0, \\ \text{Von Mises :} \quad & J_2 - k^2 = 0, \end{aligned} \quad (2.7)$$

in the first of which

$$\theta = \frac{1}{3} \cos^{-1} \left[\frac{3\sqrt{3}}{2} \frac{J_3}{J_2^{3/2}} \right], \quad 0 \leq \theta \leq \frac{\pi}{3}. \quad (2.8)$$

In this form, the Coulomb model is so ugly that a simplified version (the Drucker-Prager model) is often used:

$$\text{Drucker-Prager :} \quad \alpha I_1 + \sqrt{J_2} = k, \quad (2.9)$$

where, roughly, $\alpha \sim \phi$ and $k \sim c$. The plastic stress strain relation for the Drucker-Prager law is then

$$d\varepsilon_{ij}^p = d\lambda \left[\alpha \delta_{ij} + \frac{\tau_{ij}}{2\sqrt{J_2}} \right]. \quad (2.10)$$

Hardening plasticity: critical state soil mechanics

Metals are often modelled using the Tresca or Von Mises perfectly plastic yield stress, but granular materials such as soils or till are usually thought to have state-dependent yield stresses, and are called strain-hardening or strain-softening materials. It is evident, for example, that a granular medium becomes harder to compress as it is compressed. On the other hand, tills in laboratory ring shear devices have a tendency to reduce their strength (i. e., yield stress) at large strains (Iverson and others, 1997, 1998, Tulaczyk and others, 2000). However, similar tests which allow pore pressure to vary show that both hardening and softening behaviour can occur, depending on the initial porosity (Moore and Iverson, in press, Iverson and others, 2000). Such dilatant hardening can lead to stable shear, while softening behaviour leads to catastrophic failure.

Hardening plasticity is modelled by taking the yield surface to be dependent on the plastic strain. For example, in isotropic hardening, we take the yield surface to be of the form

$$f(\sigma_{ij}) = k(\varepsilon_{ij}^p). \quad (2.11)$$

Typically, we do not assume that strain increments are normal to the yield surface (the normality rule), but we might still assume (again, perhaps incorrectly (Mandl and Luque, 1970)) that the plastic strain increment tensor $d\varepsilon_{ij}^p$ is parallel to the

stress increment tensor $d\sigma_{ij}$ (the assumption of coaxiality), in which case it follows that there is a plastic potential function $g(\sigma_{ij})$, and

$$d\varepsilon_{ij}^p = d\lambda \frac{\partial g}{\partial \sigma_{ij}}; \quad (2.12)$$

consistency ((2.11) is satisfied) allows us to write this in the form

$$d\varepsilon_{ij}^p = \frac{1}{h} \left[\frac{\partial f}{\partial \sigma_{kl}} d\sigma_{kl} \right] \frac{\partial g}{\partial \sigma_{ij}}, \quad (2.13)$$

where h is the hardening modulus, and is in general a function of stress and plastic strain, given by

$$h = \frac{\partial k}{\partial \varepsilon_{ij}^p} \frac{\partial g}{\partial \sigma_{ij}}. \quad (2.14)$$

We expect $h > 0$ for strain hardening materials, but $h < 0$ for softening materials, and it seems likely that unstable failure would be the result (as occurs in practice, e.g., Iverson and others, 2000).

A particular example of a hardening plasticity model is the Cam-clay model, which is best described by a diagram (figure 1). The yield surface consists of three parts: a tension failure surface, the (hardening) Hvorslev surface, and the (softening) Roscoe surface. Generalised models of this type are called cap models, where in figure 1, the Roscoe surface is the cap which prevents the dilatant Hvorslev surface extending to large stresses. Extensive discussion of the Cam-clay model is given by Clarke (1987).

Finite strain

An essential complication associated with shearing flow is that the plastic strains are large. In such cases, one can often neglect the small elastic strains, and we have the Levy-Mises model, in which $d\varepsilon_{ij}^p = d\varepsilon_{ij}$. However, there is now an issue in describing how the strain and stress tensors evolve in time. The simplest situation is in ideal plasticity, where we use (2.3). Simply dividing by dt , we have

$$\dot{\varepsilon}_{ij} = \Lambda \frac{\partial f}{\partial \sigma_{ij}}, \quad f(\sigma_{ij}) = k, \quad (2.15)$$

where the Lagrange multiplier $\Lambda = \dot{\lambda}$ is to be determined. This constitutes seven equations for the six stress tensor components σ_{ij} , $i \leq j$, and Λ , and in principle we

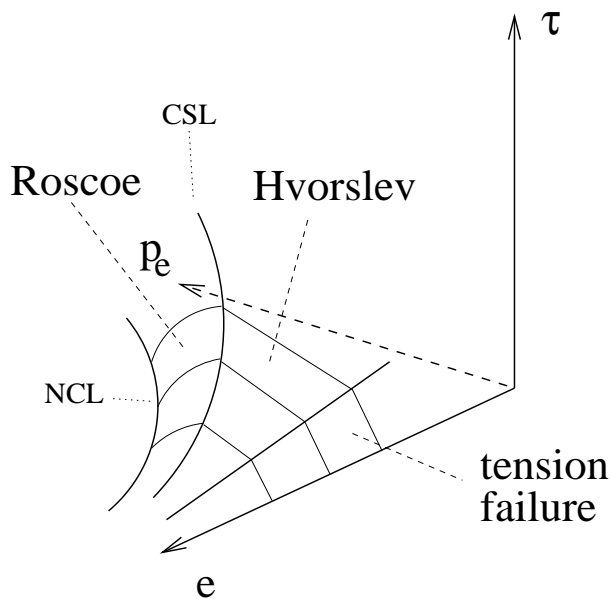


Figure 1: A schematic representation of the Cam-clay yield surface in conditions of plane strain. The stress space is described by the normal (effective) stress p_e and the shear stress τ , and the state dependence (plastic strain) is described by the void ratio $e = \phi/(1 - \phi)$, where ϕ is the porosity. The yield surface intersects the zero shear stress plane at the normal consolidation line (NCL), and the Roscoe and Hvorslev yield surfaces intersect at the critical state line (CSL).

can solve them to find

$$\sigma_{ij} = F_{ij}(\dot{\epsilon}_{kl}), \quad (2.16)$$

and the plastic flow region is essentially described by a nonlinear form of Stokes's equations for slow viscous flow.

There are two particular difficulties associated with finite strain (or, with creep). The first of these is that we would like that the Stokes equations,

$$\frac{\partial \sigma_{ij}}{\partial x_j} = 0, \quad (2.17)$$

which describe slow creeping flow, form an elliptic set of equations for the velocities u_i , when (2.16) is used as a constitutive law. In hardening plasticity, this is not always the case. The second complication is that, in hardening plasticity, we can see from (2.13) that increments of strain depend on increments of stress, so that division by dt will lead to a constitutive relation which involves time derivatives of stress. It is well-known that the ordinary material time derivative of the stress tensor is not

objective, that is to say it is not frame-indifferent, and therefore the time derivative of stress must be modified to allow this to be so. There is no unique way to do this! A popular choice is to define the *Jaumann derivative*

$$\overset{\nabla}{\sigma}_{ij} = \dot{\sigma}_{ij} - \sigma_{ip}\omega_{pj} - \sigma_{jp}\omega_{pi}, \quad (2.18)$$

where ω is the spin tensor

$$\omega_{ij} = \frac{1}{2} \left(\frac{\partial u_j}{\partial x_i} - \frac{\partial u_i}{\partial x_j} \right), \quad (2.19)$$

and $\dot{\sigma}_{ij}$ denotes the ordinary material derivative. Typical constitutive relations to relate $\dot{\epsilon}_{ij}$ to $\overset{\nabla}{\sigma}_{ij}$ are complicated and fundamentally nonlinear (Rudnicki and Rice, 1975, Nemat-Nasser and Zhang, 2002), and the Jaumann derivative itself is nonlinear. Therefore it is by no means obvious how even a simple shear flow will behave.

Plastic shear flow; shear bands

This can be illustrated with the very simplest kind of flow law, the Levy-Mises equation for the Von Mises yield stress law (2.7)₃. Dividing by dt leads to the viscous flow law

$$\dot{\epsilon}_{ij} = \Lambda \tau_{ij}, \quad (2.20)$$

where $\Lambda = \dot{\lambda}$ must be consistent with the Von Mises yield stress. For the apparently physically sensible problem of a shear flow driven by a shear stress τ , we have $J_2 = \tau^2$, thus $\tau = k$, and the shear velocity profile is given by

$$\frac{\partial u}{\partial z} = \Lambda k, \quad (2.21)$$

and Λ is completely unconstrained. This simple example suggests that something is amiss with the problem formulation. Mandl and Luque (1970) suggest other fundamental difficulties with this model, which they associate with the choice of an associative flow rule.

In fact, it is well known that in granular flows, deformation often occurs through the formation of shear bands, which are thin zones, typically of width about ten grain diameters (Li and Richmond, 1997, Francois and others, 2002). It is thought

that shear bands arise through an instability which is associated with a transition of the equation type from elliptic to hyperbolic (and thus ill-posedness) (Schaeffer and others, 1990, Schaeffer, 1992, Burns, 1989, Lee, 1989, Vardoulakis, 1996). In particular, instability occurs before the ill-posedness (Schaeffer and others, 1990), something which also occurs in two-phase flow (Prosperetti and Satrape 1990). What appears not to be so clear is how one should model the subsequent deformation. It seems clear that the formation of shear bands will lead to distributed deformation, and some efforts to deal with this have been made in the context of subglacial till (Iverson and others, 1998); Iverson and Iverson (2001) pose a model of slip deformation which leads to effective shear with depth. Such efforts deserve to be continued in the search for an effective averaged flow law.

3 Discussion

It is clear from the numerous laboratory experimental studies that till behaves like other granular materials, and is probably best modelled as a plastic material. However, it is not at all clear from the theoretical studies of plastic shear flow how the resulting deformation should be modelled. It is clearly consistent with observations of shear banding that deformation should occur at depth, but it is completely unclear whether this can be effectively modelled via a viscous flow law, as suggested by Hindmarsh (1997). The more obvious recipe, that the effective basal boundary condition for a deforming till layer should be a prescribed shear stress, may be confounded by the necessity, in hardening models for example, to introduce nonlinear Jaumann stress derivatives, which generate normal stresses in a shear flow.

Nor is it clear from laboratory experiments themselves what the yield stress should be. The observation that shear bands tend to have a thickness of the order of ten grain diameters (Francois and others, 2001) suggests that small scale tests in thin shearing layers may not reflect the true yield stress, and this is also suggested by the necessity in such experiments of removing too large clasts. On the other hand, the existence of a yield stress for till is consistent with many field studies, where of course

clast removal is not an issue (e.g., Kamb, 2001, Fischer and Clarke, 2001).

A further confounding effect is the dependence of yield stress on effective normal pressure. In a glacier, this will vary on rapid time scales because of the effect of pore water pressure. Tulaczyk (1999) used this to build a model of deformation with depth. A better approach may be to use experimentally derived friction laws for fault gouge (Marone, 1998) to provide a description for shear stress.

There are two major results that theoreticians require from a model of basal deformation. These are prescriptions for till flux and basal ice velocity (the ‘sliding law’) in terms of basal stress and effective pressure. If we assume a plastic flow law given by standard formulations such as that of hardening plasticity, it seems from our discussion here that there will be effective deformation with depth, and the resultant sliding law and till flux may well appear to derive from an apparent rheology in which strain rate varies locally with stress. Simply to state that till is plastic does not of itself preclude the formulation of distributed basal deformation over long time scales as an effectively viscous process.

References

- Alley, R. B. 2000. Continuity comes first: recent progress in understanding subglacial deformation. In: Deformation of glacial materials, eds. A. J. Maltman, B. Hubbard and M. J. Hambrey, *Geol. Soc. Spec. Pub.* **176**, pp. 171–179. Geological Society, London.
- Alley, R. B., D. D. Blankenship, S. T. Rooney and C. R. Bentley. 1987. Till beneath ice stream B. 4. A coupled ice-till model. *J. Geophys. Res.* **92** (B9), 8931–8940.
- Bentley, C. R. 1987. Antarctic ice streams: a review. *J. Geophys. Res.* **92** (B9), 8843–8859.
- Blankenship, D. D., C. R. Bentley, S. T. Rooney and R. B. Alley. 1987. Till beneath ice stream B. 1. Properties derived from seismic travel times. *J. Geophys. Res.* **92** (B9), 8903–8911.

- Boulton, G.S. and K.E. Dobbie. 1998. Slow flow of granular aggregates: the deformation of sediments beneath glaciers. *Phil. Trans. R. Soc. Lond.* **356** (1747), 2713–2745.
- Boulton, G.S. and R.C.A. Hindmarsh. 1987. Sediment deformation beneath glaciers: rheology and geological consequences. *J. Geophys. Res.* **92** (B9), 9059–9082.
- Boulton, G.S. and A.S. Jones. 1979. Stability of temperate ice caps and ice sheets resting on beds of deformable sediment. *J. Glaciol.* **24** (90), 29–43.
- Burns, T.J. 1989. Similarity and bifurcation in unstable visco-plastic shear. *SIAM J. Appl. Math.* **49** (1), 314–329.
- Chen, W.F. and E. Mizuno. 1990. Nonlinear analysis in soil mechanics. Elsevier, Amsterdam.
- Clarke, G.K.C. 1987. Subglacial till: a physical framework for its properties and processes. *J. Geophys. Res.* **92** (B9), 9023–9036.
- Clarke, G.K.C., S.G. Collins and D.E. Thompson. 1984. Flow, thermal structure and subglacial conditions of a surge-type glacier. *Can. J. Earth Sci.* **21** (2), 232–240.
- Cundall, P.A. and O.D.L. Strack. 1979. A discrete numerical model for granular assemblies. *Géotechnique* **29** (1), 47–65.
- Fischer, U.H. and G.K.C. Clarke. 2001. Review of subglacial hydro-mechanical coupling: Trapridge Glacier, Yukon Territory, Canada. *Quatern. Int.* **86**, 29–44.
- Fowler, A.C. 2000. An instability mechanism for drumlin formation. In: Deformation of glacial materials, eds. A.J. Maltman, B. Hubbard and M.J. Hambrey, *Geol. Soc. Spec. Pub.* **176**, pp. 307–319. Geological Society, London.
- Francois, B., F. Lacombe and H.J. Herrmann. 2002. Finite width of shear zones. *Phys. Rev. E* **65**, 031311.

- Harris, D. 1992. Plasticity models for soil, granular and jointed rock materials. *J. Mech. Phys. Solids* **40** (2), 273–290.
- Hill, R. 1950. The mathematical theory of plasticity. Clarendon Press, Oxford.
- Hindmarsh, R. C. A. 1997. Deforming beds: viscous and plastic scales of deformation. *Quat. Sci. Rev.* **16** (9), 1039–1056.
- Hindmarsh, R. C. A. 1998. The stability of a viscous till sheet coupled with ice flow, considered at wavelengths less than the ice thickness. *J. Glaciol.* **44** (147), 285–292.
- Hooke, R. LeB., B. Hanson, N. R. Iverson, P. Jansson and U. H. Fischer. 1997. Rheology of till beneath Storglaciären, Sweden. *J. Glaciol.* **43** (143), 172–179.
- Iverson, N. R., R. W. Baker and T. S. Hooyer. 1997. A ring-shear device for the study of till deformation: tests on tills with contrasting clay contents. *Quat. Sci. Revs.* **16** (9), 1057–1066.
- Iverson, N. R., T. S. Hooyer and R. W. Baker. 1998. Ring-shear studies of till deformation: Coulomb-plastic behaviour and distributed strain in glacier beds. *J. Glaciol.* **44** (148), 634–642.
- Iverson, N. R. and R. M. Iverson. 2001. Distributed shear of subglacial till due to Coulomb slip. *J. Glaciol.* **47** (158), 481–488.
- Iverson, R. M., M. E. Reid, N. R. Iverson, R. G. LaHusen, M. Logan, J. E. Mann and D. L. Brien. 2000. Acute sensitivity of landslide rates to initial soil porosity. *Science* **290**, 513–516.
- Kamb, B. 1991. Rheological nonlinearity and flow instability in the deforming bed mechanism of ice stream motion. *J. Geophys. Res.* **96** (B10), 16,585–16,595.
- Kamb, B. 2001. Basal zone of the West Antarctic ice streams and its role in lubrication of their rapid motion. In: The West Antarctic ice sheet: behaviour

- and environment, eds. R. B. Alley and R. A. Bindschadler. *Antarctic Research Series* **77**, pp. 157–199. A. G. U., Washington, D. C.
- Lee, Y. K. 1989. Conditions for shear banding and material instability in finite elasto-plastic deformation. *Int. J. Plasticity* **5** (3), 197–226.
- Li, M. and O. Richmond. 1997. Intrinsic instability and non-uniformity of plastic deformation. *Int. J. Plasticity* **13** (8–9), 765–784.
- Lliboutry, L. 1979. Local friction laws for glaciers: a critical review and new openings. *J. Glaciol.* **23** (89), 67–95.
- MacAyeal, D. R. 1993. Binge/purge oscillations of the Laurentide ice sheet as a cause of the North Atlantic’s Heinrich events. *Paleoceanography* **8** (6), 775–784.
- Marone, C. 1998. Laboratory-derived friction laws and their application to seismic faulting. *Ann. Rev. Earth Planet. Sci.* **26**, 643–696.
- Mandl, G. and R. F. Luque. 1970. Fully developed plastic shear flow of granular materials. *Géotechnique* **20** (3), 277–307.
- Meier, M. F. and A. Post. 1987. Fast tidewater glaciers. *J. Geophys. Res.* **92** (B9), 9051–9058.
- Moore, P. L. and N. R. Iverson. 2002. Slow episodic shear of granular materials regulated by dilatant strengthening. *Geology*, in press.
- Morgan, J. K. and M. S. Boettcher. 1999. Numerical simulation of granular shear zones using the distinct-element method. I. Shear zone kinematics and the micromechanics of localization. *J. Geophys. Res.* **104** (B2), 2,703–2,720.
- Nemat-Nasser, S. and J. H. Zhang. 2002. Constitutive relations for cohesionless granular materials. *Int. J. Plasticity* **18** (4), 531–547.
- Ng, F. S. L. 2000. Coupled ice-till deformation near subglacial channels and cavities. *J. Glaciol.* **46** (155), 580–598.

- Porter, P.R. and T. Murray. 2001. Mechanical and hydraulic properties of till beneath Bakaninbreen, Svalbard. *J. Glaciol.* **47** (157), 167–175.
- Prosperetti, A. and J. V. Satrape. 1990. Stability of two-phase flow models. In: Two-phase flow models and waves, eds. D. D. Joseph and D. G. Schaeffer, Springer, New York, pp. 98–117.
- Rudnicki, J.W. and J.R. Rice. 1975. Conditions for the localization of deformation in pressure-sensitive dilatant materials. *J. Mech. Phys. Solids* **23** (6), 371–394.
- Schaeffer, D.G. 1992. A mathematical model for localization in granular flow. *Proc. R. Soc. Lond. A* **436** (1,897), 217–250.
- Schaeffer, D.G., M. Shearer and E.B. Pitman. 1990. Instability in critical state theories of granular flow. *SIAM J. Appl. Math.* **50** (1), 33–47.
- Tulaczyk, S.M. 1999. Ice sliding over weak, fine-grained tills, dependence of ice-till interactions on till granulometry. In: Glacial processes: past and present, eds. D.M. Mickelson and J.W. Attig, *Geol. Soc. Amer. Spec. Pap.* **337**, pp. 159–177.
- Tulaczyk, S.M., B. Kamb and H.F. Engelhardt. 2000. Basal mechanics of Ice Stream B, West Antarctica. I. Till mechanics. *J. Geophys. Res.* **105** (B1), 463–481.
- Truffer, M., W.D. Harrison and K.A. Echelmeyer. 2000. Glacier motion dominated by processes deep in underlying till. *J. Glaciol.* **46** (153), 213–221.
- Vardoulakis, I. 1996. Deformation of water-saturated sand. II. Effect of pore water flow and shear banding. *Géotechnique* **46** (3), 457–472.
- Weertman, J. 1979. The unsolved general glacier sliding problem. *J. Glaciol.* **23** (89), 97–115.